

START HERE



Password screen: When you activate the touch-panel located at the wall or the podium you will first see a password entry screen

Input password: After inputting your four digit password the AV system will turn on and you will be taken to the presentation mode user interface.

PRESENTATION MODE




Presentation Mode:

On this screen you will find quick access to the most often used sources to present onto the video walls located around the multi purpose facilities

- 1 **Blank Screens:** Press this button to temporarily turn off all displays, Press again to restore the displays
- 2 **Audio and Camera:** Use these menus to access the audio and video control, adjust or mute microphones and adjust camera position and tracking
- 3 **Volume:** Control the volume of the presenting source. This source can be selected in the room setup
- 4 **Sources and Destinations:** 6 common sources are listed in columns for each video wall destination. Scroll vertically to reveal more sources
- 5 **Video Wall Controls:** Configure the regions of display for the video walls see Video Wall controls for more info
- 6 **Routing Mode:** Press this to enter routing mode giving you more control over video sources and destinations.

ROUTING MODE

Routing Mode: Using this menu you can take finer control over what source is playing on what section of each video wall

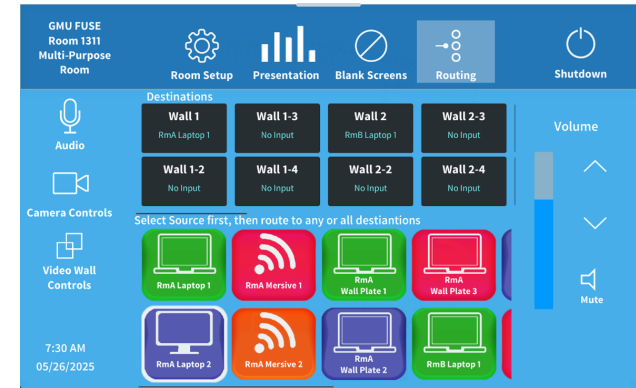

Destinations: These are the available destinations that video can be sent to depending on the video wall settings

Sources: Here you can see a list of all available sources that can be assigned to the destinations above, includes all HDMI connections around the multi-purpose rooms, Wireless sharing, live camera feeds, or Control room PCs


How to assign sources: First, select the desired source from the list of sources. When selected the source will be highlighted with a white border. Then, Select a destination from the list to assign the selected source to the video wall section.

VIDEO WALL CONTROLS

Video Wall Controls: Change the layout of the selected video wall using the orange buttons on the left. Send a source to a section of a video wall in the same way as the routing screen

Available Screen modes:

- Single full screen: 1 input Source on the whole wall
- PiP: 1 main Source with another in a corner
- Side By Side: 2 sources next to each other
- 2 Source Event: full wall background with a source inlaid
- 4 Source Quad: up to 4 sources displayed each in a corner

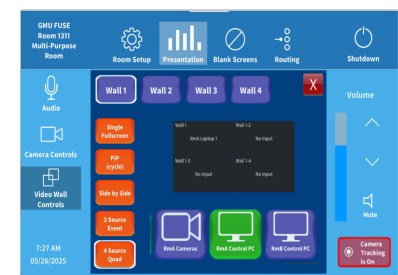

Scan this QR code to see more details about classroom features and resources

